



ACD100NSD

N-CHANNEL POWER MOSFET

DESCRIPTION

The ACD100NSD is an enhancement mode, N-channel lateral MOSFET specifically designed for professional audio applications.



FEATURES

- ADVANCED AUDIO CONTROL
- SEMEFAB/CLASS-D CUSTOM DESIGN
- HIGH VOLTAGE (200V)
- HIGH ENERGY RATING (125W)
- ENHANCEMENT MODE
- OSCILLATION PROTECTED
- P-CHANNEL COMPLEMENT (ACD102PSD) ALSO AVAILABLE

1.0 ABSOLUTE MAXIMUM RATINGS

(T_{case} = 25°C unless otherwise stated)

PARAMETER		RATING	UNITS
V _{DSX}	Drain – Source Voltage	200	V
V _{GSS}	Gate – Source Voltage	±18	V
I _D	Continuous Drain Current	8	A
I _{D(PK)}	Body – Drain Diode Reverse Drain Current	8	A
P _D	Total Power Dissipation	125	W
T _{stg}	Storage Temperature Range	-55 to +150	°C
T _j	Maximum Operating Junction Temperature	+150	°C

	<h1>ACD100NSD</h1> <h2>N-CHANNEL POWER MOSFET</h2>
---	--

2.0 ELECTRICAL CHARACTERISTICS - STATIC

(Tcase = 25°C unless otherwise stated)

Characteristic		Test Conditions	Min	Typ	Max	Units
BV _{DSX}	Drain - Source Breakdown Voltage	V _{GS} = -10V I _D = 10mA	200	220		V
BV _{GSS}	Gate - Source Breakdown Voltage	I _{GSS} = 100μA	-18		18	V
V _{GS(OFF)}	Gate - Source Cut-Off Voltage	V _{DS} = 10V I _D = 100mA	0.15		1.5	V
V _{DS(SAT)} *	Drain - Source Saturation Voltage	V _{GD} = 0 I _D = 8A			12	V
I _{DSX}	Drain - Source Cut-Off Current	V _{GS} = -10V V _{DS} = 200V			10	mA
yfs*	Forward Transfer Admittance	V _{DS} = 10V I _D = 3A	0.7		2	S

* Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2%

3.0 ELECTRICAL CHARACTERISTICS - DYNAMIC







(Tcase = 25°C unless otherwise stated)

Characteristic		Test Conditions	Min	Typ	Max	Units
C _{iss}	Input Capacitance	V _{DS} = 10V f = 1MHz		500		pF
C _{oss}	Output Capacitance			300		
C _{rss}	Reverse Transfer Capacitance			10		
t _{on}	Turn-on Time	V _{DS} = 20V I _D = 5A		100		ns
t _{off}	Turn-off Time			50		



ACD100NSD N-CHANNEL POWER MOSFET

4.0 TYPICAL CHARACTERISTICS

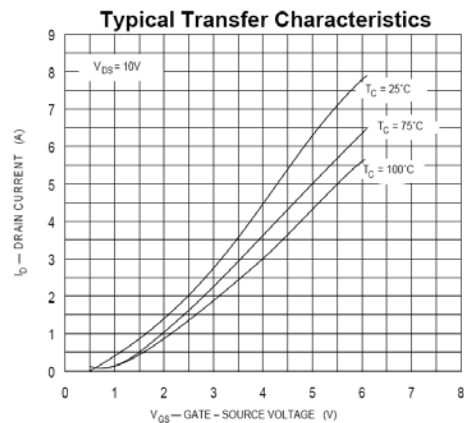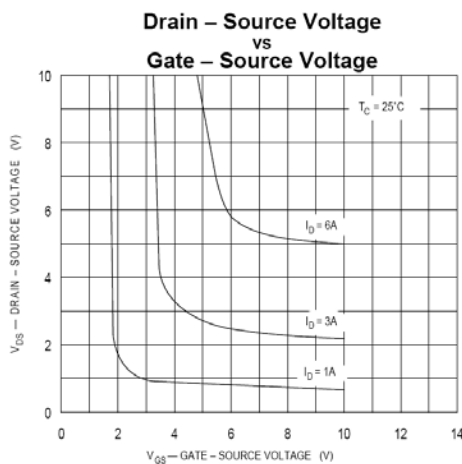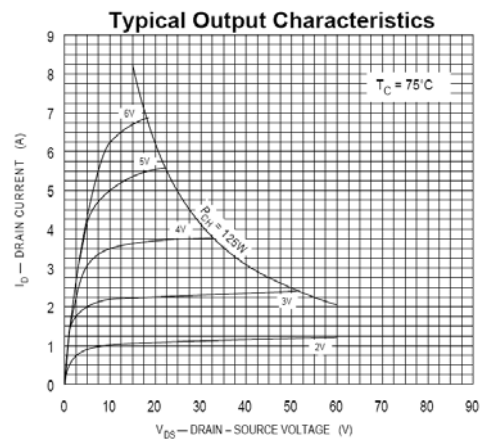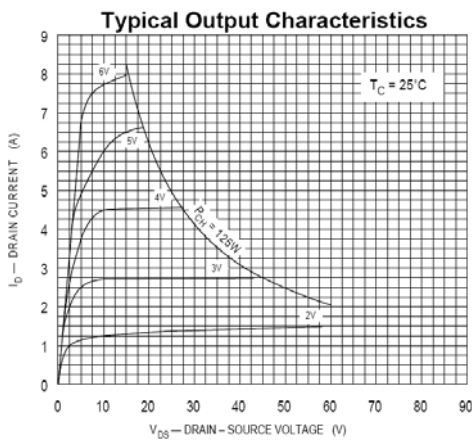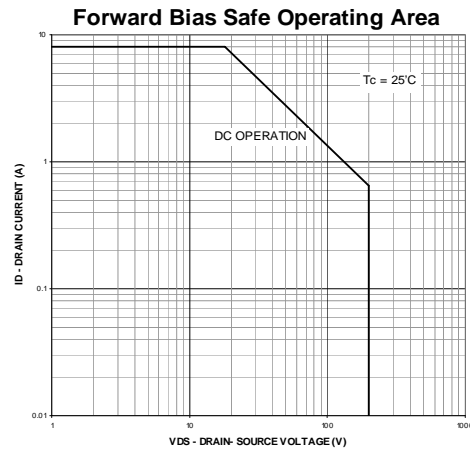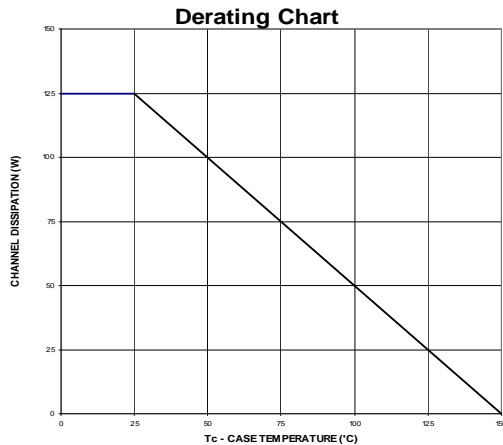



ACD100NSD
N-CHANNEL POWER MOSFET

Preliminary datasheets contain specifications based on conservative analysis and are current on publication date. Further evaluation will be carried to assess the products' maximum ratings, which may be higher than the conservative values shown in this preliminary specification.

Semefab (Scotland) Ltd. may change this specification at any time without notification.

Supply of products conforms to Semefab (Scotland) Ltd.'s Terms and Conditions.

LIFE SUPPORT APPLICATIONS

This product is not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury.

Semefab (Scotland) Ltd. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Semefab (Scotland) Ltd. for any damages resulting from such improper use or sale.

Semefab (Scotland) Ltd
Newark Road South
Eastfield Industrial Estate
Glenrothes, Fife KY74NS
Scotland
United Kingdom
Telephone: +44 (0) 1592 630 630
Fax: +44 (0) 1592 775 265
Email sales@semefab.co.uk

©Semefab 2008